

User manual of RC818/CM280

-----wireless car rear view system

Thank you for choosing the wireless car rear view system, it will add joy to your life and improve the safety when backing a car. Before using the system, please read the manual carefully.


I .Feature

1. Mini camera
- 2 Wireless transmitter and receive
- 3.Beautiful appearance
- 4.2.5" color LCD
- 5.Monitor can be put in the platform at random.
- 6.Wireless DVD can be put outside, USB, Mini SD card , wireless DVD is optional if your car with CD Plug.
- 7.Easy for installing.

II Technique Parameter

Model No.	RC818	CM280
Power supply	DC12V	DC12V
Power consumption:	200mA	110mA
Frequency:	2.4G	2.4G
Pixel	960*240	320TV line

III.Exterior Description

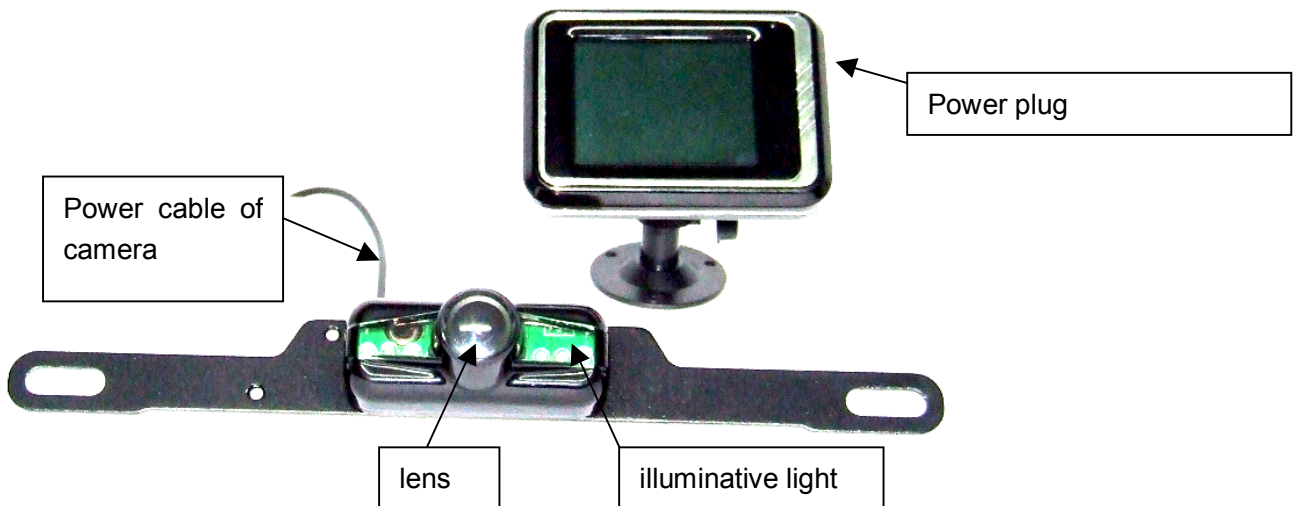

IV Installation

Necessary tools: pincers, screwdriver

1、 Take off the license plate



2、 Take off the inside part of later box



3、Open the cover of license plate light



4、Make the power cable of camera through the light hole of license plate, fix up the transmitter board on the surface of armor plate of the later cover(Notice:if the transmitter put in the interbeded of will affect the receive quality)



transmitter

5, Fixup the camera on the rack of licence plate
(Make sure the cushion put as picture show)



6, Stretch the Power cable of camera to the place of backup light and connected to the power of it.



7, Revert to the original , finish the installation of camera



8, Plug the power of monitor on the car charge,rive off the pastern and put the monitor to the right place.



9, live picture when backing a car



V Notice

- 1,It is better to use a small wire to guide the power cable of camera through the iron interbeded .
- 2.On the step 6,we can add some lubricating oil to make it easier to pull
- 3.Check if the luminous light works when backing the car, it doesn't work if failed connect to the power .
- 4.If there is no signal or bad picture quality after installed the camera and LCD, please check if put the transmitter in the interbeded, In that case,it may result to signal is shields or attenuation. It should be put in place which can go to the front part of the car

VI Accessories

- 1.CM280CWS
2. RC818
3. 12V car charger
4. Bevel cushion and other fittings
5. Instruction